

**CONTENT (MLCC)**

**E STANDARD NUMBER..... 3**

**STRUCTURE ..... 4**

**ORDERING CODE ..... 4**

    HIGH Q & LOW ESR TYPE (Q SERIES)..... 5

        TEST SPEC. .... 10


**PACKAGE ..... 12**

**OTHERS ..... 14**

**E Standard Number**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| E3  | 1.0 |     |     |     |     |     | 2.2 |     |     |     |     |     | 4.7 |     |     |     |     |     |     |     |     |     |     |     |
| E6  | 1.0 |     |     | 1.5 |     |     | 2.2 |     |     | 3.3 |     |     | 4.7 |     |     | 6.8 |     |     |     |     |     |     |     |     |
| E12 | 1.0 | 1.2 | 1.5 | 1.8 | 2.2 | 2.7 | 3.3 | 3.9 | 4.7 | 5.6 | 6.8 | 8.2 |     |     |     |     |     |     |     |     |     |     |     |     |
| E24 | 1.0 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 | 1.8 | 2.0 | 2.2 | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 | 3.9 | 4.3 | 4.7 | 5.1 | 5.6 | 6.2 | 6.8 | 7.5 | 8.2 | 9.1 |

## Structure

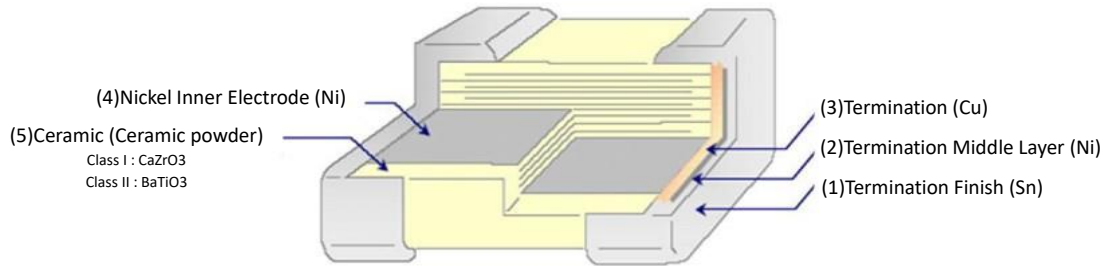

## Ordering Code

**C 1005 NP0 101 J G T Q**

### PRODUCT CODE

C = MLCC

### SIZE in mm (EIA CODE, in inch)

0402(01005)    0603(0201)    1005 (0402)    1608 (0603)    2012 (0805)  
 3216 (1206)    3225(1210)    4520 (1808)    4532 (1812)

### T. C.

NP0: 0 ± 30ppm/°C    -55°C to +125°C  
 X7R: ±15%    -55°C to +125°C    X6S: ±22%    -55°C to +105°C  
 X5R: ±15%    -55°C to +85°C    Y5V: +22%/-82%    -30°C to +85°C

### CAPACITANCE CODE

Expressed in pico-farads and identified by a three-digit number.  
 First two digits represent significant figures.  
 Last digit specifies the number of zeros.  
 (Use 9 for 1.0 through 9.9pF ; Use 8 for 0.20 through 0.99pF)

Examples:

| Code | Cap (pF) |
|------|----------|
| 478  | 0.47     |
| 229  | 2.2      |
| 101  | 100      |
| 102  | 1000     |

### TOLERANCE CODE

A: ± 0.05pF    B: ± 0.1pF    C: ± 0.25pF    D: ± 0.5pF    F: ±1%    G: ±2%  
 J: ±5%    K: ±10%    M: ±20%    Z: +80/-20%

### VOLTAGE CODE

B: 4V    C: 6.3V    D: 10V    E: 16V    F: 25V    N: 35V    G: 50V    H: 100V  
 J: 200V    K: 250V    L: 500V    M: 630V    P: 1KV    Q: 2KV    R: 3KV    S: 4KV

### PACKAGING CODE

T: Paper tape reel Ø180mm (7")    P: Embossed tape reel Ø180mm (7")  
 N: Paper tape reel Ø250mm (10")    D: Embossed tape reel Ø250mm (10")  
 A: Paper tape reel Ø330mm (13")    E: Embossed tape reel Ø330mm (13")  
 W: Special Packing

### Application Code

S: Standard    Q: High Q/Low ESR    F: Microwave    A: Automotive Infotainment with AEC-Q200

## High Q & Low ESR Type (Q Series)


■ **Feature**

1. Ultra-stable
2. Tight tolerance available
3. Low ESR (Frequency is within 2.4GHz)
4. Good frequency performance
5. No aging of capacitance
6. RoHS compliant
7. Halogen Free

■ **Application**

1. LC and RC tuned circuit
2. Filtering
3. Timing

■ **Standard External Dimensions**

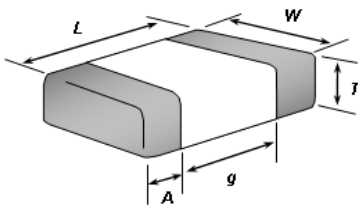

| TYPE<br>(EIA Size) | Dimension (mm) |            |          |         |             |
|--------------------|----------------|------------|----------|---------|-------------|
|                    | L (Length)     | W (Width)  | T (Max.) | g (Min) | A (Min/Max) |
| C0603<br>(0201)    | 0.6±0.03       | 0.3±0.03   | 0.33     | 0.15    | 0.10 / 0.20 |
| C1005<br>(0402)    | 1.0 ± 0.05     | 0.5 ± 0.05 | 0.55     | 0.30    | 0.15 / 0.35 |
| C1608<br>(0603)    | 1.6 ± 0.10     | 0.8 ± 0.10 | 0.90     | 0.50    | 0.25 / 0.65 |

■ **Part Number & Characteristic**

● **C0603NP0\_Q Series (EIA0201)**

| RV              | DARFON P/N      | Measuring Condition | Capacitance |                          | Available Tolerance      | Thick. (mm) | Tolerance(mm) |        | Testing Freq | ESR mΩ (max.) | Q (min.) | Standard Packing |
|-----------------|-----------------|---------------------|-------------|--------------------------|--------------------------|-------------|---------------|--------|--------------|---------------|----------|------------------|
|                 |                 |                     | Value       | Unit                     |                          |             | L/W           | Thick. |              |               |          |                  |
| 50V             | C0603NP0108CGTQ | 1V, 1MHz            | 0.1         | pF                       | ±0.25pF                  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 4547          | 350      | Paper, 15Kpcs    |
|                 | C0603NP0208□GTQ | 1V, 1MHz            | 0.2         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 2274          | 350      |                  |
|                 | C0603NP0308□GTQ | 1V, 1MHz            | 0.3         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 1516          | 350      |                  |
|                 | C0603NP0408□GTQ | 1V, 1MHz            | 0.4         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 1137          | 350      |                  |
|                 | C0603NP0508□GTQ | 1V, 1MHz            | 0.5         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 909           | 350      |                  |
|                 | C0603NP0608□GTQ | 1V, 1MHz            | 0.6         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 758           | 350      |                  |
|                 | C0603NP0708□GTQ | 1V, 1MHz            | 0.7         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 650           | 350      |                  |
|                 | C0603NP0758□GTQ | 1V, 1MHz            | 0.75        | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 606           | 350      |                  |
|                 | C0603NP0808□GTQ | 1V, 1MHz            | 0.8         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 568           | 350      |                  |
|                 | C0603NP0908□GTQ | 1V, 1MHz            | 0.9         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 505           | 350      |                  |
|                 | C0603NP0109□GTQ | 1V, 1MHz            | 1.0         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 455           | 350      |                  |
|                 | C0603NP0119□GTQ | 1V, 1MHz            | 1.1         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 482           | 300      |                  |
|                 | C0603NP0129□GTQ | 1V, 1MHz            | 1.2         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 442           | 300      |                  |
|                 | C0603NP0139□GTQ | 1V, 1MHz            | 1.3         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 408           | 300      |                  |
|                 | C0603NP0149□GTQ | 1V, 1MHz            | 1.4         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 379           | 300      |                  |
|                 | C0603NP0159□GTQ | 1V, 1MHz            | 1.5         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 354           | 300      |                  |
|                 | C0603NP0169□GTQ | 1V, 1MHz            | 1.6         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 332           | 300      |                  |
|                 | C0603NP0179□GTQ | 1V, 1MHz            | 1.7         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 312           | 300      |                  |
|                 | C0603NP0189□GTQ | 1V, 1MHz            | 1.8         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 295           | 300      |                  |
|                 | C0603NP0209□GTQ | 1V, 1MHz            | 2.0         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 318           | 250      |                  |
|                 | C0603NP0229□GTQ | 1V, 1MHz            | 2.2         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 289           | 250      |                  |
|                 | C0603NP0249□GTQ | 1V, 1MHz            | 2.4         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 265           | 250      |                  |
|                 | C0603NP0259□GTQ | 1V, 1MHz            | 2.5         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 255           | 250      |                  |
|                 | C0603NP0279□GTQ | 1V, 1MHz            | 2.7         | pF                       | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 236           | 250      |                  |
| C0603NP0309□GTQ | 1V, 1MHz        | 3.0                 | pF          | ±0.25pF, ±0.1pF, ±0.05pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 265          | 200           |          |                  |
| C0603NP0339□GTQ | 1V, 1MHz        | 3.3                 | pF          | ±0.25pF, ±0.1pF, ±0.05pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 241          | 200           |          |                  |
| C0603NP0369□GTQ | 1V, 1MHz        | 3.6                 | pF          | ±0.25pF, ±0.1pF, ±0.05pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 221          | 200           |          |                  |
| C0603NP0399□GTQ | 1V, 1MHz        | 3.9                 | pF          | ±0.25pF, ±0.1pF, ±0.05pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 204          | 200           |          |                  |
| C0603NP0409CGTQ | 1V, 1MHz        | 4.0                 | pF          | ±0.25pF                  | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 199          | 200           |          |                  |
| C0603NP0439□GTQ | 1V, 1MHz        | 4.3                 | pF          | ±0.25pF, ±0.1pF, ±0.05pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 185          | 200           |          |                  |
| C0603NP0479□GTQ | 1V, 1MHz        | 4.7                 | pF          | ±0.25pF, ±0.1pF, ±0.05pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 169          | 200           |          |                  |

| RV              | DARFON P/N      | Measuring Condition | Capacitance |                         | Available Tolerance      | Thick. (mm) | Tolerance(mm) |        | Testing Freq | ESR mΩ (max.) | Q (min.) | Standard Packing |
|-----------------|-----------------|---------------------|-------------|-------------------------|--------------------------|-------------|---------------|--------|--------------|---------------|----------|------------------|
|                 |                 |                     | Value       | Unit                    |                          |             | L/W           | Thick. |              |               |          |                  |
| 50V             | C0603NP0509□GTQ | 1V, 1MHz            | 5.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 177           | 180      | Paper, 15Kpcs    |
|                 | C0603NP0519□GTQ | 1V, 1MHz            | 5.1         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 173           | 180      |                  |
|                 | C0603NP0569□GTQ | 1V, 1MHz            | 5.6         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 158           | 180      |                  |
|                 | C0603NP0609□GTQ | 1V, 1MHz            | 6.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 147           | 180      |                  |
|                 | C0603NP0629□GTQ | 1V, 1MHz            | 6.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 143           | 180      |                  |
|                 | C0603NP0689□GTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 130           | 180      |                  |
|                 | C0603NP0709□GTQ | 1V, 1MHz            | 7.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 189           | 120      |                  |
|                 | C0603NP0759□GTQ | 1V, 1MHz            | 7.5         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 177           | 120      |                  |
|                 | C0603NP0809□GTQ | 1V, 1MHz            | 8.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 166           | 120      |                  |
|                 | C0603NP0829□GTQ | 1V, 1MHz            | 8.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 162           | 120      |                  |
|                 | C0603NP0909□GTQ | 1V, 1MHz            | 9.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 147           | 120      |                  |
|                 | C0603NP0919□GTQ | 1V, 1MHz            | 9.1         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 146           | 120      |                  |
|                 | C0603NP0100□GTQ | 1V, 1MHz            | 10          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 133           | 120      |                  |
|                 | C0603NP0110□GTQ | 1V, 1MHz            | 11          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 138           | 105      |                  |
|                 | C0603NP0120□GTQ | 1V, 1MHz            | 12          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 147           | 90       |                  |
|                 | C0603NP0130□GTQ | 1V, 1MHz            | 13          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 153           | 80       |                  |
|                 | C0603NP0150□GTQ | 1V, 1MHz            | 15          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 152           | 70       |                  |
|                 | C0603NP0160□GTQ | 1V, 1MHz            | 16          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 166           | 60       |                  |
|                 | C0603NP0180□GTQ | 1V, 1MHz            | 18          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 147           | 60       |                  |
|                 | C0603NP0200□GTQ | 1V, 1MHz            | 20          | pF                      | ±5%, ±2%                 | 0.30        | ±0.03         | ±0.03  | 1GHz         | 199           | 40       |                  |
| C0603NP0220□GTQ | 1V, 1MHz        | 22                  | pF          | ±5%, ±2%, ±1%           | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 207          | 35            |          |                  |
| 25V             | C0603NP0108□FTQ | 1V, 1MHz            | 0.1         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 4547          | 350      | Paper, 15Kpcs    |
|                 | C0603NP0208□FTQ | 1V, 1MHz            | 0.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 2274          | 350      |                  |
|                 | C0603NP0308□FTQ | 1V, 1MHz            | 0.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 1516          | 350      |                  |
|                 | C0603NP0408□FTQ | 1V, 1MHz            | 0.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 1137          | 350      |                  |
|                 | C0603NP0508□FTQ | 1V, 1MHz            | 0.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 909           | 350      |                  |
|                 | C0603NP0608□FTQ | 1V, 1MHz            | 0.6         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 758           | 350      |                  |
|                 | C0603NP0708□FTQ | 1V, 1MHz            | 0.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 650           | 350      |                  |
|                 | C0603NP0758□FTQ | 1V, 1MHz            | 0.75        | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 606           | 350      |                  |
|                 | C0603NP0808□FTQ | 1V, 1MHz            | 0.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 568           | 350      |                  |
|                 | C0603NP0908□FTQ | 1V, 1MHz            | 0.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 505           | 350      |                  |
|                 | C0603NP0109□FTQ | 1V, 1MHz            | 1.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 455           | 350      |                  |
|                 | C0603NP0119□FTQ | 1V, 1MHz            | 1.1         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 482           | 300      |                  |
|                 | C0603NP0129□FTQ | 1V, 1MHz            | 1.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 442           | 300      |                  |
|                 | C0603NP0139□FTQ | 1V, 1MHz            | 1.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 408           | 300      |                  |
|                 | C0603NP0149□FTQ | 1V, 1MHz            | 1.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 379           | 300      |                  |
|                 | C0603NP0159□FTQ | 1V, 1MHz            | 1.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 354           | 300      |                  |
|                 | C0603NP0169□FTQ | 1V, 1MHz            | 1.6         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 332           | 300      |                  |
|                 | C0603NP0189□FTQ | 1V, 1MHz            | 1.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 295           | 300      |                  |
|                 | C0603NP0209□FTQ | 1V, 1MHz            | 2.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 318           | 250      |                  |
|                 | C0603NP0229□FTQ | 1V, 1MHz            | 2.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 289           | 250      |                  |
|                 | C0603NP0249□FTQ | 1V, 1MHz            | 2.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 265           | 250      |                  |
|                 | C0603NP0259□FTQ | 1V, 1MHz            | 2.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 255           | 250      |                  |
|                 | C0603NP0279□FTQ | 1V, 1MHz            | 2.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 236           | 250      |                  |
|                 | C0603NP0309□FTQ | 1V, 1MHz            | 3.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 265           | 200      |                  |
|                 | C0603NP0339□FTQ | 1V, 1MHz            | 3.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 241           | 200      |                  |
|                 | C0603NP0369□FTQ | 1V, 1MHz            | 3.6         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 221           | 200      |                  |
|                 | C0603NP0399□FTQ | 1V, 1MHz            | 3.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 204           | 200      |                  |
|                 | C0603NP0409□FTQ | 1V, 1MHz            | 4.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 199           | 200      |                  |
|                 | C0603NP0439□FTQ | 1V, 1MHz            | 4.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 185           | 200      |                  |
|                 | C0603NP0479□FTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.30        | ±0.03         | ±0.03  | 1GHz         | 169           | 200      |                  |
|                 | C0603NP0509□FTQ | 1V, 1MHz            | 5.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 177           | 180      |                  |
|                 | C0603NP0519□FTQ | 1V, 1MHz            | 5.1         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 173           | 180      |                  |
|                 | C0603NP0569□FTQ | 1V, 1MHz            | 5.6         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 158           | 180      |                  |
|                 | C0603NP0609□FTQ | 1V, 1MHz            | 6.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 147           | 180      |                  |
|                 | C0603NP0629□FTQ | 1V, 1MHz            | 6.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 143           | 180      |                  |
|                 | C0603NP0689□FTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 130           | 180      |                  |
|                 | C0603NP0709□FTQ | 1V, 1MHz            | 7.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 189           | 120      |                  |
|                 | C0603NP0759□FTQ | 1V, 1MHz            | 7.5         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 177           | 120      |                  |
|                 | C0603NP0829□FTQ | 1V, 1MHz            | 8.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 162           | 120      |                  |
|                 | C0603NP0909□FTQ | 1V, 1MHz            | 9.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.30        | ±0.03         | ±0.03  | 1GHz         | 147           | 120      |                  |
| C0603NP0919□FTQ | 1V, 1MHz        | 9.1                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 146          | 120           |          |                  |
| C0603NP0959□FTQ | 1V, 1MHz        | 9.5                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 140          | 120           |          |                  |
| C0603NP0100□FTQ | 1V, 1MHz        | 10                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 133          | 120           |          |                  |
| C0603NP0110□FTQ | 1V, 1MHz        | 11                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 138          | 105           |          |                  |
| C0603NP0120□FTQ | 1V, 1MHz        | 12                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 147          | 90            |          |                  |
| C0603NP0130□FTQ | 1V, 1MHz        | 13                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 153          | 80            |          |                  |
| C0603NP0150□FTQ | 1V, 1MHz        | 15                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 152          | 70            |          |                  |
| C0603NP0160□FTQ | 1V, 1MHz        | 16                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 166          | 60            |          |                  |
| C0603NP0180□FTQ | 1V, 1MHz        | 18                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 147          | 60            |          |                  |
| C0603NP0200□FTQ | 1V, 1MHz        | 20                  | pF          | ±5%, ±2%                | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 199          | 40            |          |                  |
| C0603NP0220□FTQ | 1V, 1MHz        | 22                  | pF          | ±5%, ±2%, ±1%           | 0.30                     | ±0.03       | ±0.03         | 1GHz   | 207          | 35            |          |                  |

□ Tolerance Code: A=±0.05 pF, B=±0.1pF, C=±0.25pF, D=±0.5pF, G=±2%, J=±5%; Special tolerance on the request.

● C1005NP0\_Q Series (EIA0402)

| RV              | DARFON P/N      | Measuring Condition | Capacitance |                         | Available Tolerance      | Thick. (mm) | Tolerance(mm) |        | Testing Freq | ESR mΩ (max.) | Q (min.) | Standard Packing |
|-----------------|-----------------|---------------------|-------------|-------------------------|--------------------------|-------------|---------------|--------|--------------|---------------|----------|------------------|
|                 |                 |                     | Value       | Unit                    |                          |             | L/W           | Thick. |              |               |          |                  |
| 100V            | C1005NP0308□HTQ | 1V, 1MHz            | 0.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 1768          | 300      | Paper, 10Kpcs    |
|                 | C1005NP0109□HTQ | 1V, 1MHz            | 1.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 531           | 300      |                  |
| 50V             | C1005NP0108BGTQ | 1V, 1MHz            | 0.1         | pF                      | ±0.1pF                   | 0.50        | ±0.05         | ±0.05  | 1GHz         | 5305          | 300      | Paper, 10Kpcs    |
|                 | C1005NP0208□GTQ | 1V, 1MHz            | 0.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 2653          | 300      |                  |
|                 | C1005NP0308□GTQ | 1V, 1MHz            | 0.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 1768          | 300      |                  |
|                 | C1005NP0408□GTQ | 1V, 1MHz            | 0.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 1326          | 300      |                  |
|                 | C1005NP0508□GTQ | 1V, 1MHz            | 0.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 1061          | 300      |                  |
|                 | C1005NP0568□GTQ | 1V, 1MHz            | 0.56        | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 947           | 300      |                  |
|                 | C1005NP0608□GTQ | 1V, 1MHz            | 0.6         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 884           | 300      |                  |
|                 | C1005NP0708□GTQ | 1V, 1MHz            | 0.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 758           | 300      |                  |
|                 | C1005NP0758□GTQ | 1V, 1MHz            | 0.75        | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 707           | 300      |                  |
|                 | C1005NP0808□GTQ | 1V, 1MHz            | 0.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 663           | 300      |                  |
|                 | C1005NP0828□GTQ | 1V, 1MHz            | 0.82        | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 647           | 300      |                  |
|                 | C1005NP0908□GTQ | 1V, 1MHz            | 0.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 589           | 300      |                  |
|                 | C1005NP0109□GTQ | 1V, 1MHz            | 1.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 531           | 300      |                  |
|                 | C1005NP0119□GTQ | 1V, 1MHz            | 1.1         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 482           | 300      |                  |
|                 | C1005NP0129□GTQ | 1V, 1MHz            | 1.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 531           | 250      |                  |
|                 | C1005NP0139□GTQ | 1V, 1MHz            | 1.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 490           | 250      |                  |
|                 | C1005NP0159□GTQ | 1V, 1MHz            | 1.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 424           | 250      |                  |
|                 | C1005NP0169□GTQ | 1V, 1MHz            | 1.6         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 398           | 250      |                  |
|                 | C1005NP0189□GTQ | 1V, 1MHz            | 1.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 354           | 250      |                  |
|                 | C1005NP0209□GTQ | 1V, 1MHz            | 2.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 398           | 200      |                  |
|                 | C1005NP0229□GTQ | 1V, 1MHz            | 2.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 362           | 200      |                  |
|                 | C1005NP0249□GTQ | 1V, 1MHz            | 2.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 332           | 200      |                  |
|                 | C1005NP0259□GTQ | 1V, 1MHz            | 2.5         | pF                      | ±0.25pF, ±0.1pF          | 0.50        | ±0.05         | ±0.05  | 1GHz         | 318           | 200      |                  |
|                 | C1005NP0279□GTQ | 1V, 1MHz            | 2.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 295           | 200      |                  |
|                 | C1005NP0299□GTQ | 1V, 1MHz            | 2.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 274           | 200      |                  |
|                 | C1005NP0309□GTQ | 1V, 1MHz            | 3.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 265           | 200      |                  |
|                 | C1005NP0339□GTQ | 1V, 1MHz            | 3.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 241           | 200      |                  |
|                 | C1005NP0369□GTQ | 1V, 1MHz            | 3.6         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 246           | 180      |                  |
|                 | C1005NP0399□GTQ | 1V, 1MHz            | 3.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 227           | 180      |                  |
|                 | C1005NP0409□GTQ | 1V, 1MHz            | 4.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 221           | 180      |                  |
|                 | C1005NP0439□GTQ | 1V, 1MHz            | 4.3         | pF                      | ±0.25pF, ±0.1pF          | 0.50        | ±0.05         | ±0.05  | 1GHz         | 206           | 180      |                  |
|                 | C1005NP0479□GTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.50        | ±0.05         | ±0.05  | 1GHz         | 188           | 180      |                  |
|                 | C1005NP0509□GTQ | 1V, 1MHz            | 5.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 212           | 150      |                  |
|                 | C1005NP0519□GTQ | 1V, 1MHz            | 5.1         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 208           | 150      |                  |
|                 | C1005NP0569□GTQ | 1V, 1MHz            | 5.6         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 189           | 150      |                  |
|                 | C1005NP0609□GTQ | 1V, 1MHz            | 6.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 177           | 150      |                  |
|                 | C1005NP0629□GTQ | 1V, 1MHz            | 6.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 171           | 150      |                  |
|                 | C1005NP0689□GTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 156           | 150      |                  |
|                 | C1005NP0709□GTQ | 1V, 1MHz            | 7.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 227           | 100      |                  |
|                 | C1005NP0759□GTQ | 1V, 1MHz            | 7.5         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 212           | 100      |                  |
| C1005NP0809□GTQ | 1V, 1MHz        | 8.0                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 199          | 100           |          |                  |
| C1005NP0829□GTQ | 1V, 1MHz        | 8.2                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 194          | 100           |          |                  |
| C1005NP0909□GTQ | 1V, 1MHz        | 9.0                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 177          | 100           |          |                  |
| C1005NP0919□GTQ | 1V, 1MHz        | 9.1                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 175          | 100           |          |                  |
| C1005NP0959□GTQ | 1V, 1MHz        | 9.5                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 186          | 90            |          |                  |
| C1005NP0100□GTQ | 1V, 1MHz        | 10                  | pF          | ±5%, ±2%, ±1%           | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 199          | 80            |          |                  |
| C1005NP0110□GTQ | 1V, 1MHz        | 11                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 207          | 70            |          |                  |
| C1005NP0120□GTQ | 1V, 1MHz        | 12                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 221          | 60            |          |                  |
| C1005NP0150□GTQ | 1V, 1MHz        | 15                  | pF          | ±5%, ±2%, ±1%           | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 265          | 40            |          |                  |
| C1005NP0160□GTQ | 1V, 1MHz        | 16                  | pF          | ±5%, ±2%, ±1%           | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 284          | 35            |          |                  |
| C1005NP0180□GTQ | 1V, 1MHz        | 18                  | pF          | ±5%, ±2%, ±1%           | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 295          | 30            |          |                  |
| C1005NP0200□GTQ | 1V, 1MHz        | 20                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 398          | 20            |          |                  |
| C1005NP0220□GTQ | 1V, 1MHz        | 22                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 1GHz   | 362          | 20            |          |                  |
| C1005NP0300□GTQ | 1V, 1MHz        | 30                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 500MHz | 295          | 18            |          |                  |
| C1005NP0330□GTQ | 1V, 1MHz        | 33                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 500MHz | 301          | 16            |          |                  |
| C1005NP0430□GTQ | 1V, 1MHz        | 43                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 500MHz | 264          | 14            |          |                  |
| C1005NP0470□GTQ | 1V, 1MHz        | 47                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 500MHz | 339          | 10            |          |                  |
| C1005NP0560□GTQ | 1V, 1MHz        | 56                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 500MHz | 316          | 9             |          |                  |
| C1005NP0620□GTQ | 1V, 1MHz        | 62                  | pF          | ±5%, ±2%                | 0.50                     | ±0.05       | ±0.05         | 500MHz | 321          | 8             |          |                  |
| 25V             | C1005NP0508BFTQ | 1V, 1MHz            | 0.5         | pF                      | ±0.1pF                   | 0.50        | ±0.05         | ±0.05  | 1GHz         | 1061          | 300      | Paper, 10Kpcs    |
|                 | C1005NP0209BFTQ | 1V, 1MHz            | 2.0         | pF                      | ±0.1pF                   | 0.50        | ±0.05         | ±0.05  | 1GHz         | 398           | 200      |                  |
|                 | C1005NP0479CFTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF                  | 0.50        | ±0.05         | ±0.05  | 1GHz         | 188           | 180      |                  |
| 16V             | C1005NP0109BETQ | 1V, 1MHz            | 1.0         | pF                      | ±0.1pF                   | 0.50        | ±0.05         | ±0.05  | 1GHz         | 531           | 300      | Paper, 10Kpcs    |

□ Tolerance Code: A=±0.05 pF, B=±0.1pF, C=±0.25pF, D=±0.5pF, G=±2%, J=±5%; Special tolerance on the request.

● C1608NP0\_Q Series (EIA0603)

| RV              | DARFON P/N      | Measuring Condition | Capacitance |                         | Available Tolerance      | Thick. (mm) | Tolerance(mm) |        | Testing Freq | ESR mΩ (max.) | Q (min.) | Standard Packing |
|-----------------|-----------------|---------------------|-------------|-------------------------|--------------------------|-------------|---------------|--------|--------------|---------------|----------|------------------|
|                 |                 |                     | Value       | Unit                    |                          |             | L/W           | Thick. |              |               |          |                  |
| 250V            | C1608NP0308□KTQ | 1V, 1MHz            | 0.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 2122          | 250      | Paper, 4Kpcs     |
|                 | C1608NP0408□KTQ | 1V, 1MHz            | 0.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 1592          | 250      |                  |
|                 | C1608NP0508□KTQ | 1V, 1MHz            | 0.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 1273          | 250      |                  |
|                 | C1608NP0758□KTQ | 1V, 1MHz            | 0.75        | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 849           | 250      |                  |
|                 | C1608NP0808□KTQ | 1V, 1MHz            | 0.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 796           | 250      |                  |
|                 | C1608NP0109□KTQ | 1V, 1MHz            | 1.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 637           | 250      |                  |
|                 | C1608NP0129□KTQ | 1V, 1MHz            | 1.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 663           | 200      |                  |
|                 | C1608NP0159□KTQ | 1V, 1MHz            | 1.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 200      |                  |
|                 | C1608NP0189□KTQ | 1V, 1MHz            | 1.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 200      |                  |
|                 | C1608NP0209□KTQ | 1V, 1MHz            | 2.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 150      |                  |
|                 | C1608NP0229□KTQ | 1V, 1MHz            | 2.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 150      |                  |
|                 | C1608NP0249□KTQ | 1V, 1MHz            | 2.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 150      |                  |
|                 | C1608NP0279□KTQ | 1V, 1MHz            | 2.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 393           | 150      |                  |
|                 | C1608NP0309□KTQ | 1V, 1MHz            | 3.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 100      |                  |
|                 | C1608NP0339□KTQ | 1V, 1MHz            | 3.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 100      |                  |
|                 | C1608NP0399□KTQ | 1V, 1MHz            | 3.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 408           | 100      |                  |
|                 | C1608NP0479□KTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 339           | 100      |                  |
|                 | C1608NP0519□KTQ | 1V, 1MHz            | 5.1         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 347           | 90       |                  |
|                 | C1608NP0569□KTQ | 1V, 1MHz            | 5.6         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 355           | 80       |                  |
|                 | C1608NP0609□KTQ | 1V, 1MHz            | 6.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 332           | 80       |                  |
|                 | C1608NP0689□KTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 293           | 80       |                  |
|                 | C1608NP0829□KTQ | 1V, 1MHz            | 8.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 277           | 70       |                  |
| C1608NP0919□KTQ | 1V, 1MHz        | 9.1                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 250          | 70            |          |                  |
| C1608NP0100□KTQ | 1V, 1MHz        | 10                  | pF          | ±5%, ±2%                | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 227          | 70            |          |                  |
| C1608NP0120□KTQ | 1V, 1MHz        | 12                  | pF          | ±5%                     | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 332          | 40            |          |                  |
| C1608NP0150□KTQ | 1V, 1MHz        | 15                  | pF          | ±5%, ±2%                | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 303          | 35            |          |                  |
| C1608NP0180□KTQ | 1V, 1MHz        | 18                  | pF          | ±5%, ±2%                | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 295          | 30            |          |                  |
| C1608NP0220□KTQ | 1V, 1MHz        | 22                  | pF          | ±5%, ±2%                | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 289          | 25            |          |                  |
| 200V            | C1608NP0208□JTQ | 1V, 1MHz            | 0.2         | pF                      | ±0.25pF, ±0.1pF          | 0.80        | ±0.10         | ±0.10  | 1GHz         | 3183          | 250      | Paper, 4Kpcs     |
|                 | C1608NP0129BJTQ | 1V, 1MHz            | 1.2         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 663           | 200      |                  |
|                 | C1608NP0159BJTQ | 1V, 1MHz            | 1.5         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 200      |                  |
|                 | C1608NP0189BJTQ | 1V, 1MHz            | 1.8         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 200      |                  |
|                 | C1608NP0229BJTQ | 1V, 1MHz            | 2.2         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 150      |                  |
|                 | C1608NP0249□JTQ | 1V, 1MHz            | 2.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 150      |                  |
|                 | C1608NP0279BJTQ | 1V, 1MHz            | 2.7         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 393           | 150      |                  |
|                 | C1608NP0309BJTQ | 1V, 1MHz            | 3.0         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 100      |                  |
|                 | C1608NP0339BJTQ | 1V, 1MHz            | 3.3         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 100      |                  |
|                 | C1608NP0399BJTQ | 1V, 1MHz            | 3.9         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 408           | 100      |                  |
|                 | C1608NP0439BJTQ | 1V, 1MHz            | 4.3         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 370           | 100      |                  |
|                 | C1608NP0479□JTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 339           | 100      |                  |
|                 | C1608NP0519□JTQ | 1V, 1MHz            | 5.1         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 347           | 90       |                  |
|                 | C1608NP0689BJTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.1pF                   | 0.80        | ±0.10         | ±0.10  | 1GHz         | 293           | 80       |                  |
| C1608NP0829CJTQ | 1V, 1MHz        | 8.2                 | pF          | ±0.25pF                 | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 277          | 70            |          |                  |
| 100V            | C1608NP0308□HTQ | 1V, 1MHz            | 0.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 2122          | 250      | Paper, 4Kpcs     |
|                 | C1608NP0508□HTQ | 1V, 1MHz            | 0.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 1273          | 250      |                  |
|                 | C1608NP0758□HTQ | 1V, 1MHz            | 0.75        | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 849           | 250      |                  |
|                 | C1608NP0109□HTQ | 1V, 1MHz            | 1.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 637           | 250      |                  |
|                 | C1608NP0129□HTQ | 1V, 1MHz            | 1.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 663           | 200      |                  |
|                 | C1608NP0159□HTQ | 1V, 1MHz            | 1.5         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 200      |                  |
|                 | C1608NP0189□HTQ | 1V, 1MHz            | 1.8         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 200      |                  |
|                 | C1608NP0209□HTQ | 1V, 1MHz            | 2.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 150      |                  |
|                 | C1608NP0229□HTQ | 1V, 1MHz            | 2.2         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 150      |                  |
|                 | C1608NP0249□HTQ | 1V, 1MHz            | 2.4         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 150      |                  |
|                 | C1608NP0279□HTQ | 1V, 1MHz            | 2.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 393           | 150      |                  |
|                 | C1608NP0309□HTQ | 1V, 1MHz            | 3.0         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 100      |                  |
|                 | C1608NP0339□HTQ | 1V, 1MHz            | 3.3         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 100      |                  |
|                 | C1608NP0399□HTQ | 1V, 1MHz            | 3.9         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 408           | 100      |                  |
|                 | C1608NP0479□HTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF, ±0.1pF, ±0.05pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 339           | 100      |                  |
|                 | C1608NP0509□HTQ | 1V, 1MHz            | 5.0         | pF                      | ±0.25pF, ±0.1pF          | 0.80        | ±0.10         | ±0.10  | 1GHz         | 354           | 90       |                  |
|                 | C1608NP0569□HTQ | 1V, 1MHz            | 5.6         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 355           | 80       |                  |
|                 | C1608NP0609□HTQ | 1V, 1MHz            | 6.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 332           | 80       |                  |
|                 | C1608NP0689□HTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 293           | 80       |                  |
|                 | C1608NP0829□HTQ | 1V, 1MHz            | 8.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 277           | 70       |                  |
|                 | C1608NP0919□HTQ | 1V, 1MHz            | 9.1         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 250           | 70       |                  |
|                 | C1608NP0100□HTQ | 1V, 1MHz            | 10          | pF                      | ±5%                      | 0.80        | ±0.10         | ±0.10  | 1GHz         | 227           | 70       |                  |
| C1608NP0120□HTQ | 1V, 1MHz        | 12                  | pF          | ±5%, ±2%, ±1%           | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 332          | 40            |          |                  |
| C1608NP0150□HTQ | 1V, 1MHz        | 15                  | pF          | ±5%                     | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 303          | 35            |          |                  |
| C1608NP0180□HTQ | 1V, 1MHz        | 18                  | pF          | ±5%                     | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 295          | 30            |          |                  |
| C1608NP0220□HTQ | 1V, 1MHz        | 22                  | pF          | ±5%                     | 0.80                     | ±0.10       | ±0.10         | 1GHz   | 289          | 25            |          |                  |

□ Tolerance Code: A=±0.05 pF, B=±0.1pF, C=±0.25pF, D=±0.5pF, G=±2%, J=±5%; Special tolerance on the request.

| RV              | DARFON P/N      | Measuring Condition | Capacitance |                         | Available Tolerance     | Thick. (mm) | Tolerance(mm) |        | Testing Freq | ESR mΩ (max.) | Q (min.) | Standard Packing |
|-----------------|-----------------|---------------------|-------------|-------------------------|-------------------------|-------------|---------------|--------|--------------|---------------|----------|------------------|
|                 |                 |                     | Value       | Unit                    |                         |             | L/W           | Thick. |              |               |          |                  |
| 50V             | C1608NP0208□GTQ | 1V, 1MHz            | 0.20        | pF                      | ±0.25pF±0.1pF, ±0.05pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 3183          | 250      | Paper, 4Kpcs     |
|                 | C1608NP0228□GTQ | 1V, 1MHz            | 0.22        | pF                      | ±0.25pF±0.1pF, ±0.05pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 2894          | 250      |                  |
|                 | C1608NP0308□GTQ | 1V, 1MHz            | 0.30        | pF                      | ±0.25pF±0.1pF, ±0.05pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 2122          | 250      |                  |
|                 | C1608NP0508□GTQ | 1V, 1MHz            | 0.50        | pF                      | ±0.25pF±0.1pF, ±0.05pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 1273          | 250      |                  |
|                 | C1608NP0758□GTQ | 1V, 1MHz            | 0.75        | pF                      | ±0.25pF±0.1pF, ±0.05pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 849           | 250      |                  |
|                 | C1608NP0109□GTQ | 1V, 1MHz            | 1.0         | pF                      | ±0.25pF±0.1pF, ±0.05pF  | 0.80        | ±0.10         | ±0.10  | 1GHz         | 637           | 250      |                  |
|                 | C1608NP0129□GTQ | 1V, 1MHz            | 1.2         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 663           | 200      |                  |
|                 | C1608NP0159□GTQ | 1V, 1MHz            | 1.5         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 200      |                  |
|                 | C1608NP0189□GTQ | 1V, 1MHz            | 1.8         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 200      |                  |
|                 | C1608NP0209□GTQ | 1V, 1MHz            | 2.0         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 150      |                  |
|                 | C1608NP0229□GTQ | 1V, 1MHz            | 2.2         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 150      |                  |
|                 | C1608NP0249□GTQ | 1V, 1MHz            | 2.4         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 442           | 150      |                  |
|                 | C1608NP0279□GTQ | 1V, 1MHz            | 2.7         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 393           | 150      |                  |
|                 | C1608NP0309□GTQ | 1V, 1MHz            | 3.0         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 531           | 100      |                  |
|                 | C1608NP0339□GTQ | 1V, 1MHz            | 3.3         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 482           | 100      |                  |
|                 | C1608NP0399□GTQ | 1V, 1MHz            | 3.9         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 408           | 100      |                  |
|                 | C1608NP0479□GTQ | 1V, 1MHz            | 4.7         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 339           | 100      |                  |
|                 | C1608NP0509□GTQ | 1V, 1MHz            | 5.0         | pF                      | ±0.25pF, ±0.1pF         | 0.80        | ±0.10         | ±0.10  | 1GHz         | 354           | 90       |                  |
|                 | C1608NP0569□GTQ | 1V, 1MHz            | 5.6         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 355           | 80       |                  |
|                 | C1608NP0609□GTQ | 1V, 1MHz            | 6.0         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 332           | 80       |                  |
|                 | C1608NP0689□GTQ | 1V, 1MHz            | 6.8         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 293           | 80       |                  |
|                 | C1608NP0829□GTQ | 1V, 1MHz            | 8.2         | pF                      | ±0.5pF, ±0.25pF, ±0.1pF | 0.80        | ±0.10         | ±0.10  | 1GHz         | 277           | 70       |                  |
| C1608NP0919□GTQ | 1V, 1MHz        | 9.1                 | pF          | ±0.5pF, ±0.25pF, ±0.1pF | 0.80                    | ±0.10       | ±0.10         | 1GHz   | 250          | 70            |          |                  |
| C1608NP0100JGTQ | 1V, 1MHz        | 10                  | pF          | ±5%                     | 0.80                    | ±0.10       | ±0.10         | 1GHz   | 227          | 70            |          |                  |
| C1608NP0120□GTQ | 1V, 1MHz        | 12                  | pF          | ±5%,±2%,±1%             | 0.80                    | ±0.10       | ±0.10         | 1GHz   | 332          | 40            |          |                  |
| C1608NP0150JGTQ | 1V, 1MHz        | 15                  | pF          | ±5%                     | 0.80                    | ±0.10       | ±0.10         | 1GHz   | 303          | 35            |          |                  |
| C1608NP0180JGTQ | 1V, 1MHz        | 18                  | pF          | ±5%                     | 0.80                    | ±0.10       | ±0.10         | 1GHz   | 295          | 30            |          |                  |
| C1608NP0220JGTQ | 1V, 1MHz        | 22                  | pF          | ±5%                     | 0.80                    | ±0.10       | ±0.10         | 1GHz   | 289          | 25            |          |                  |

□ Tolerance Code: A=±0.05 pF, B=±0.1pF, C=±0.25pF ,D=±0.5pF, G=±2%, J=±5%; Special tolerance on the request.

## ● Test Spec.

| Item      | Specification   | Test Method   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
|-----------|---|---|---|------------|---------|-------------|-----|------|------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|---------|
| 1         | <b>Operating Temperature Range</b><br>NP0: -55 to 125 °C  | ---   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 2         | <b>Rated Voltage</b><br>Shown in the table of "Part Number & Characteristic"  | The rated voltage is defined as the maximum voltage, which may be applied continuously to the capacitor.  |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 3         | <b>Appearance</b><br>No defects or abnormalities.   | Visual inspection   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 4         | <b>Dimensions</b><br>Within the specified dimension.  | Using calipers or Microscope.   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 5         | <b>Dielectric Strength (Flash)</b><br>No defects or abnormalities.  | No failure shall be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds. The charge and discharge current is less than 50mA.   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 6         | <b>Insulation Resistance ( I.R.)</b><br>I.R. $\geq 10G\Omega$   | The insulation resistance shall be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max, and within 1 minute of charging.   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 7         | <b>Capacitance</b><br>Within the specified tolerance  | The capacitance /Q shall be measured at 25°C at the frequency and voltage shown in the tables.  |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 8         | <b>Quality Factor ( Q )</b><br>30pF min.: $Q \geq 1000$<br>30pF max.: $Q \geq 400+20C$<br>C: Nominal Capacitance (pF)   | <table border="1"> <tr> <td>Frequency</td> <td>1.0±0.2MHz</td> </tr> <tr> <td>Voltage</td> <td>1.0±0.2Vrms</td> </tr> </table>  | Frequency   | 1.0±0.2MHz | Voltage | 1.0±0.2Vrms |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| Frequency | 1.0±0.2MHz  |   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| Voltage   | 1.0±0.2Vrms   |   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 9         | <b>Capacitance Temperature Characteristics</b><br>Capacitance change within 0±30ppm/ °C under operating temperature range.  | The capacitance value at 25°C and 85°C shall be measured and calculated from the formula given below.<br>T.C.=(C <sub>85</sub> -C <sub>25</sub> )/C <sub>25</sub> *ΔT*10 <sup>6</sup> (PPM/°C)  |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 10        | <b>Termination Strength</b><br>No removal of the terminations or marking defect.  | Apply a parallel force of 5N to a PCB mounted sample for 10±1sec.<br>*2N for 0603 (EIA 0201).   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 11        | <b>Deflection (Bending Strength)</b><br>No cracking or marking defects shall occur at 1mm deflection.<br>Capacitance change:<br>NP0: within ±5% or ± 0.5pF. (whichever is larger)   | Solder the capacitor to the test jig (glass epoxy boards) shown in Fig.a using a SAC305(Sn96.5Ag3.0Cu0.5) solder.<br>Then apply a force in the direction shown in Fig.b. The soldering shall be done with the reflow method and shall be conducted with care so that the soldering is uniform and free of defects such as heat shock. |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
|           | (Unit in mm)<br><table border="1"> <thead> <tr> <th>Size</th> <th>a</th> <th>b</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>0402</td> <td>0.2</td> <td>0.56</td> <td>0.23</td> </tr> <tr> <td>0603</td> <td>0.3</td> <td>0.9</td> <td>0.3</td> </tr> <tr> <td>1005</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> <tr> <td>1608</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> </tbody> </table> Fig. a. | Size  | a   | b          | C       | 0402        | 0.2 | 0.56 | 0.23 | 0603 | 0.3 | 0.9 | 0.3 | 1005 | 0.4 | 1.5 | 0.5 | 1608 | 1.0 | 3.0 | 1.2 | Fig. b. |
| Size      | a   | b   | C   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 0402      | 0.2   | 0.56  | 0.23  |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 0603      | 0.3   | 0.9   | 0.3   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 1005      | 0.4   | 1.5   | 0.5   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 1608      | 1.0   | 3.0   | 1.2   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 12        | <b>Solderability of Termination</b><br>90% of the terminations are to be soldered evenly and continuously.<br>C0402 Series:<br>75% of the terminations are to be soldered evenly and continuously.  | Immerse the test capacitor into a methanol solution containing rosin for 3 to 5 seconds, preheat it 150 to 180°C for 2 to 3 minutes and immerse it into SAC305(Sn96.5Ag3.0Cu0.5) solder of 245 ± 5°C for 3±1seconds.  |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
| 13        | <b>Resistance to Soldering Heat</b>   | Immerse the capacitor in a SAC305(Sn96.5Ag3.0Cu0.5) solder solution at 270±5°C for 10±1 seconds. Let sit at room temperature for 24±2 hours, then measure.<br>*C0402 Series is not suitable for this testing  |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
|           | <b>Appearance</b>   |   | No marking defects                                  |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
|           | <b>Cap. Change</b>  |   | NP0 within ±2.5% or ±0.25pF ( whichever is larger ) |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
|           | <b>Q</b>  |   | Initial spec.                                       |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |
|           | <b>I.R.</b>   | Initial spec.   |   |            |         |             |     |      |      |      |     |     |     |      |     |     |     |      |     |     |     |         |



|    | Item                              | Specification  | Test Method   |
|----|-----------------------------------|--|---|
| 14 | Temperature cycle (Thermal shock) | Appearance   | No marking defects  |
|    |                                   | Cap. Change  | NPO within $\pm 2.5\%$ or $0.25\text{pF}$ ( whichever is larger )   |
|    |                                   | Q  | Initial spec.   |
|    |                                   | I.R.   | Initial spec.   |
| 15 | Humidity load                     | Appearance   | No marking defects  |
|    |                                   | Cap. Change  | NPO within $\pm 5\%$ or $\pm 0.5\text{pF}$ ( whichever is larger )  |
|    |                                   | Q  | 200 min.  |
|    |                                   | I.R.   | $I.R. \geq 500\text{M}\Omega$   |
| 16 | High temperature load life test   | Appearance   | No marking defects  |
|    |                                   | Cap. Change  | NPO within $\pm 5\%$ or $\pm 0.5\text{pF}$ ( whichever is larger )  |
|    |                                   | Q  | 30pF and over : $Q \geq 350$<br>10pF and over, 30pF and below : $Q \geq 275+5C/2$<br>10pF and below : $Q \geq 200+10C$<br>C:Nominal Capacitance(pF) |
|    |                                   | I.R.   | $I.R. \geq 1\text{G}\Omega$   |
| 17 | ESR & Q                           | Shown in the table of "Part Number & Characteristic" | Testing frequency is shown in the table of "Part Number & Characteristic"   |

MLCC


High Frequency Application

## Package

- Tape and reel packaging**


Tape and reel packaging is currently the most promising system for high-speed production. A typical 180mm (7 inch) diameter reel contains 1,500 to 15,000 capacitors, 250mm (10 inch) contains 10,000 capacitors, and 330mm (13 inch) contains 10,000 to 50,000 capacitors. Three standard sizes are available in taped and reeled package either with paper carrier tapes or embossed tapes.

### 【Paper tape specifications】

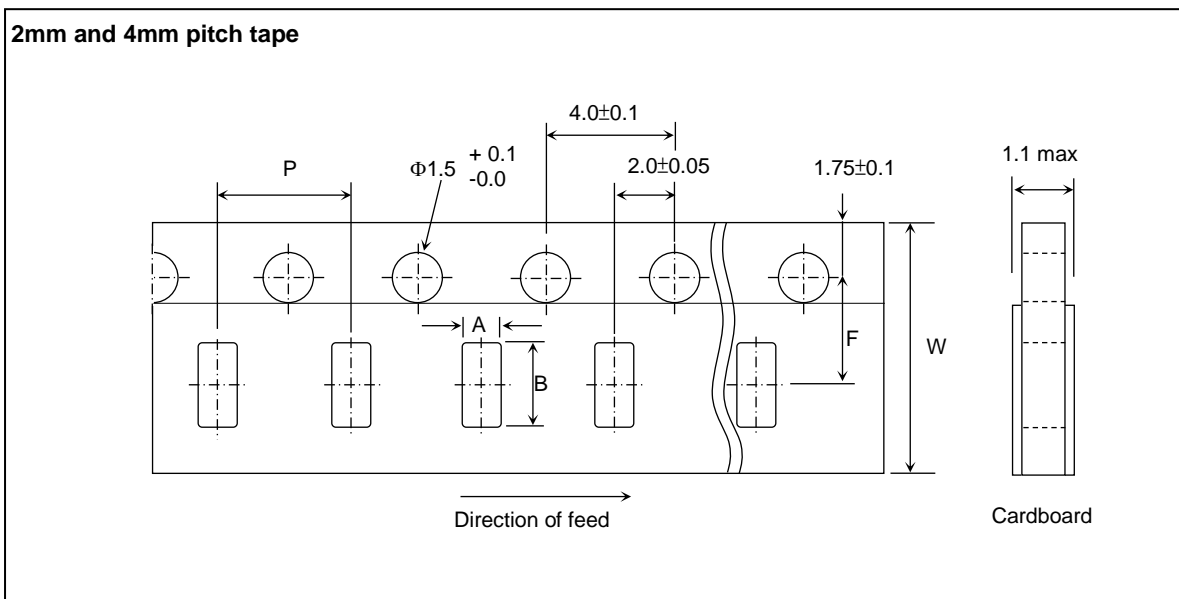

| SYMBOL | PRODUCT SIZE CODE |        |                          |        |                           |       | UNIT |
|--------|-------------------|--------|--------------------------|--------|---------------------------|-------|------|
|        | 0603(0201)        |        | 1005(0402)<br>(±0.05 mm) |        | 1608 (0603)<br>(±0.10 mm) |       |      |
|        | SIZE              | TOL.   | SIZE                     | TOL.   | SIZE                      | TOL.  |      |
| A      | 0.38              | ± 0.04 | 0.65                     | ± 0.10 | 1.0                       | ±0.2  | mm   |
| B      | 0.68              | ± 0.04 | 1.15                     | ± 0.10 | 1.8                       | ±0.2  | mm   |
| F      | 3.5               | ± 0.05 | 3.5                      | ± 0.05 | 3.5                       | ±0.05 | mm   |
| P      | 2                 | ± 0.10 | 2                        | ± 0.10 | 4                         | ±0.1  | mm   |
| W      | 8                 | ± 0.20 | 8                        | ± 0.20 | 8                         | ±0.2  | mm   |

**【Reel specifications】**

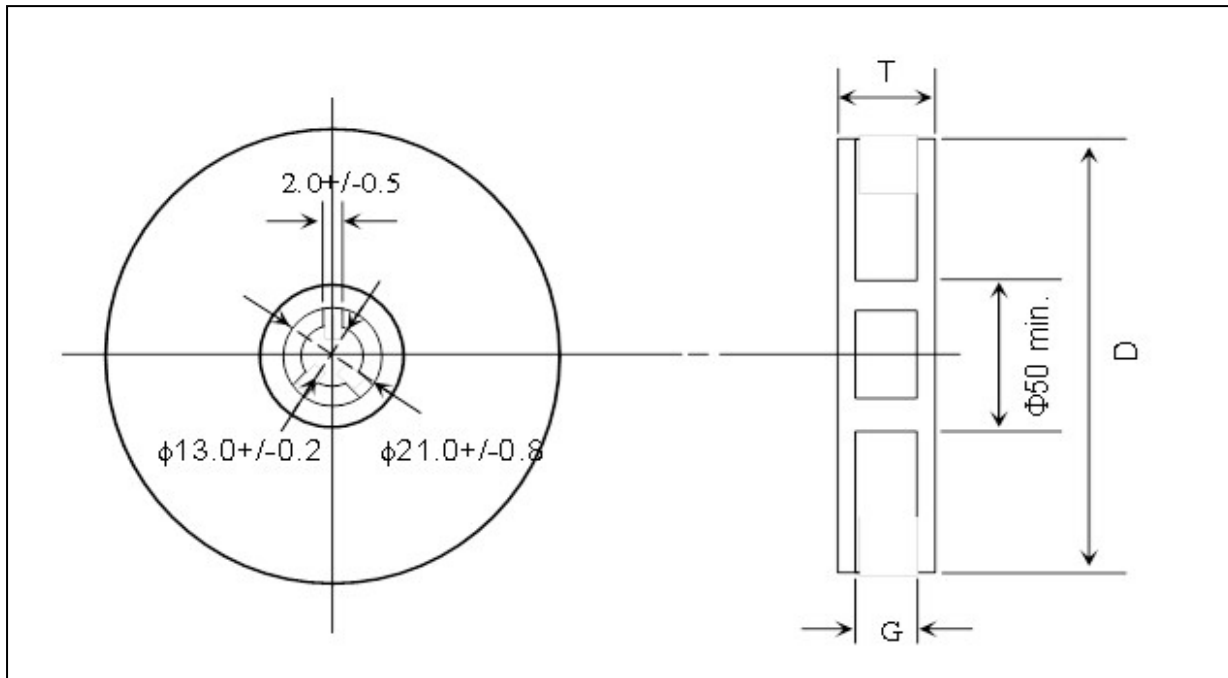

| TAPE WIDTH (mm) | G (mm)         | T max. (mm) | D (mm) |
|-----------------|----------------|-------------|--------|
| 4               | $5.0 \pm 1.5$  | 8.0         | 180    |
| 8               | $10.0 \pm 1.5$ | 14.5        | 180    |
| 8               | $10.0 \pm 1.5$ | 14.5        | 250    |
| 8               | $10.0 \pm 1.5$ | 14.5        | 330    |
| 12              | $14.0 \pm 1.5$ | 18.5        | 180    |

**【Thickness and Packing Amount】**

| Thickness |           |             | Amount per reel |          |              |          |
|-----------|-----------|-------------|-----------------|----------|--------------|----------|
| Code      | Spec.(mm) | Size (EIA)  | 180 mm (7")     |          | 330 mm (13") |          |
|           |           |             | Paper           | Embossed | Paper        | Embossed |
| A         | 0.30      | 0603 (0201) | 15K             | --       | 50K          | --       |
| B         | 0.50      | 1005 (0402) | 10K             | --       | 50K          | --       |
| D         | 0.80      | 1608 (0603) | 4K              | --       | 15K          | --       |

**【Packing Rule】**

| EIA SIZE    | Tape type    | Reel Size | Max Reels/Box |
|-------------|--------------|-----------|---------------|
| 0603 (0201) | Paper        | 7"        | 10            |
| 1005 (0402) | Paper        | 7"        | 10            |
| 1608 (0603) | Paper/Emboss | 7"        | 10            |

\*Maximum 60 reels in one carton.

## Others

### 【Storage】

1. The chip capacitors shall be packaged in carrier tapes or bulk cases.
2. Too high temperatures or humidity may deteriorate the quality of the product rapidly. Recommended products storage with temperatures from +5°C to +35°C, humidity from 45 to 70% RH.
3. The storage atmosphere must be free of gas containing sulfur and chlorine. Also, avoid exposing the product to saline moisture. If the product is exposed to such atmospheres, the terminations will oxidize and solderability will be affected.
4. In consideration of solderability, an allowable storage period should be within 12 months from the outgoing date of delivery. As for products in storage over 12 months, please check solderability before use.

### 【Circuit Design】

1. Once application and assembly environments have been checked, the capacitor may be used in conformance with the rating and performance, which are provided in both the catalog and the specifications. Exceeding the specifications listed may result in inferior performance. It may also cause a short, open, smoking, or flaming to occur, etc.
2. Please use the capacitors in conformance with the operating temperature provided in both the catalog and the specifications. Be especially cautious not to exceed the maximum temperature. In the situation the maximum temperature set forth in both the catalog and specifications is exceeded, the capacitor's insulation resistance may deteriorate, power may suddenly surge and short-circuit may occur. The loss of capacitance will occur, and may self-heat due to equivalent series resistance when alternating electric current is passed through. As this effect becomes critical in high frequency circuits, please exercise with caution. When using the capacitor in a (self-heating) circuit, please make sure the surface of the capacitor remains under the maximum temperature for usage. Also, please make certain temperature rise remain below 20°C.
3. Please keep voltage under the rated voltage, which is applied to the capacitor. Also, please make certain the peak voltage remains below the rated voltage when AC voltage is super-imposed to the DC voltage. In the situation where AC or pulse voltage is employed, ensure average peak voltage does not exceed the rated voltage. Exceeding the rated voltage provided in both catalog and specifications may lead to defective withstanding voltage or, in worse case situations, may cause the capacitor to burn out.
4. It's is a common phenomenon of high-dielectric products to have a deteriorated amount of static electricity due to the application of DC voltage.

## 【Handling】

Chip capacitors should be handled with care to avoid contamination or damage. The use of vacuum pick-up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.

## 【Flux】


1. An excessive amount of flux or too rapid temperature rise can causes solvent burst, solder can generate a large quantity of gas. The gas can spreads small solder particles to cause solder balling effect or bridging problem.
2. Flux containing too high of a percentage of halide may cause corrosion of termination unless sufficient cleaning is applied.
3. Use rosin-type flux. Highly acidic flux (halide content less than 0.2wt%) is not recommended.
4. The water soluble flux causes deteriorated insulation resistance between outer terminations unless sufficiently cleaned.

## 【Component Spacing】

For wave soldering components, the spacing must be sufficient far apart to prevent bridging or shadowing. This is not so important for reflow process but enough space for rework should be considered. The suggested spacing for reflow soldering and wave soldering is 0.5mm and 1.0mm, respectively.

## 【Solder Fillet】


Too much solder amount may increase solder stress and cause crack risk. Insufficient solder amount may reduce adhesive Strength and cause parts falling off PCB. When soldering, confirm that the solder is placed over 0.2mm of the surface of the terminations.

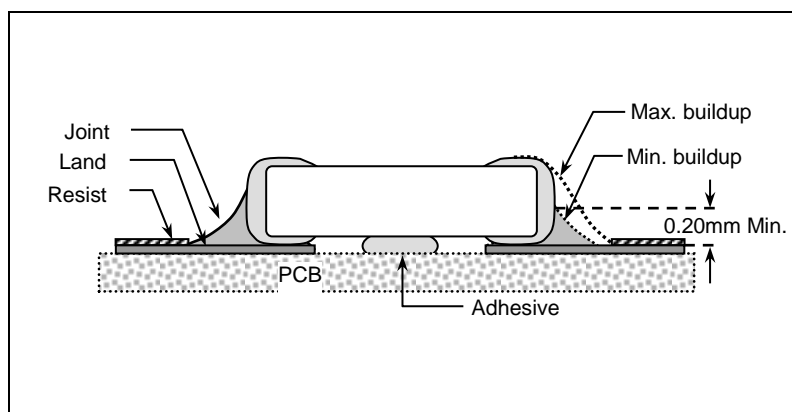

## 【Recommended Land Pattern Dimensions】

When mounting the capacitor to substrate, it's important to consider that the amount of solder (size of fillet) used has a direct effect upon the capacitor once it's mounted.

1. The greater the amount of solder, the greater the stress to the elements, as this may cause the substrate to break or crack.
2. In the situation where two or more devices are mounted onto a common land, separate the device into exclusive pads by using soldering resist.
3. Land width equal to or less than component. It is permissible to reduce land width to 80% of component width.

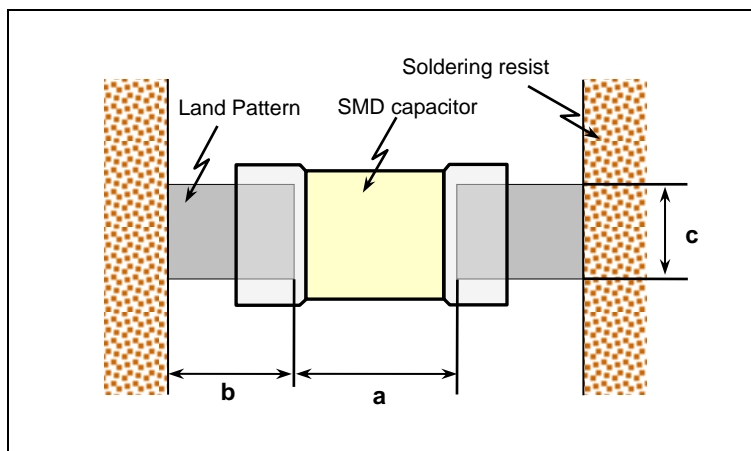


| Size mm (EIA) | L x W (mm)<br>(Dimension tolerance) | a (mm)      | b (mm)       | c (mm)      |
|---------------|-------------------------------------|-------------|--------------|-------------|
| 0603 (0201)   | 0.6*0.3<br>(within±0.03)            | 0.2 to 0.35 | 0.2 to 0.3   | 0.2 to 0.4  |
|               | 0.6*0.3<br>(±0.05/±0.09)            | 0.2 to 0.35 | 0.2 to 0.35  | 0.25 to 0.4 |
| 1005 (0402)   | 1.0*0.5<br>(within±0.10)            | 0.3 to 0.5  | 0.35 to 0.45 | 0.4 to 0.6  |
|               | 1.0*0.5<br>(±0.15/±0.20)            | 0.4 to 0.6  | 0.4 to 0.5   | 0.5 to 0.7  |
| 1608 (0603)   | 1.6*0.8<br>(within±0.10)            | 0.7 to 1.0  | 0.6 to 0.8   | 0.7 to 0.8  |
|               | 1.6*0.8<br>(±0.15/±0.20/±0.25)      | 0.8 to 1.1  | 0.7 to 0.8   | 0.8 to 1.0  |

**[Resin Mold]**

If a large amount of resin is used for molding the chip, cracks may occur due to contraction stress during curing. To avoid such cracks, use a low shrinkage resin. The insulation resistance of the chip will degrade due to moisture absorption. Use a low moisture absorption resin. Check carefully that the resin does not generate a decomposition gas or reaction gas during the curing process or during normal storage. Such gases may crack the chip capacitor or damage the device itself.

**[Soldering Profile for SMT Process with SnPb Solder Paste]**


**Reflow Soldering**

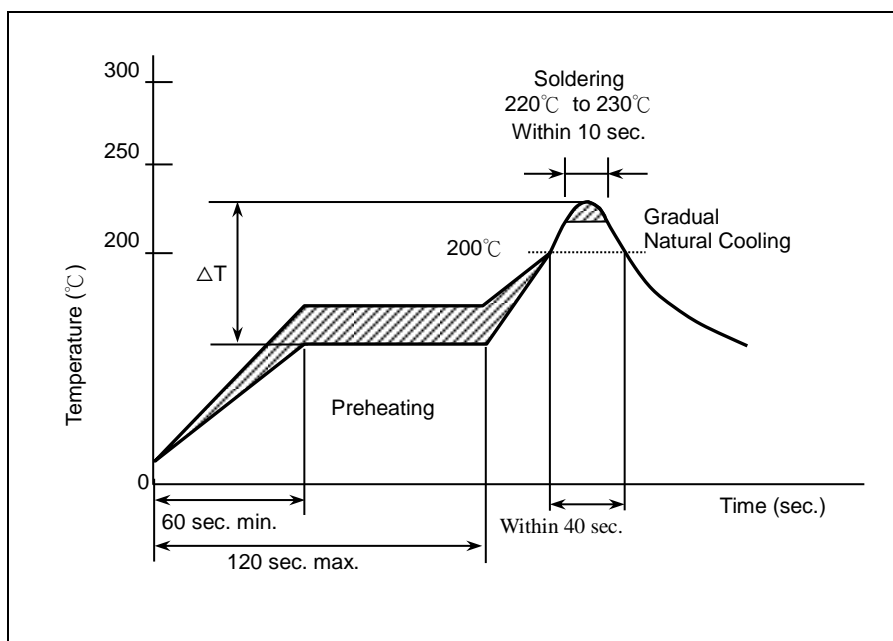

The difference between solder and chip surface should be controlled as following table. The rate of preheat should not exceed 4°C/sec and a target of 2°C/sec is preferred.


| Chip Size  | 3216 and smaller                  | 3225 and above                    |
|------------|-----------------------------------|-----------------------------------|
| Preheating | $\Delta T \leq 150^\circ\text{C}$ | $\Delta T \leq 130^\circ\text{C}$ |

## Wave Soldering

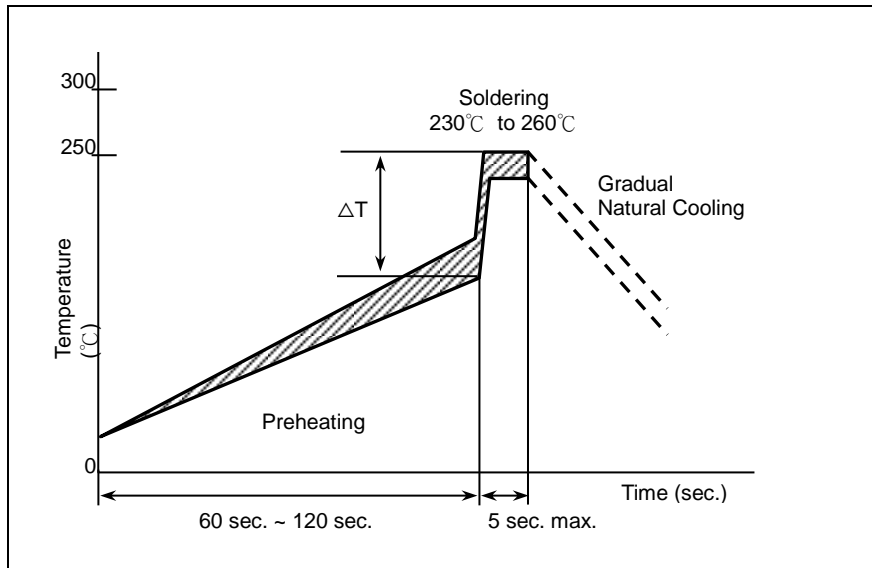

| Chip Size  | 3216 and smaller                  | 3225 and above |
|------------|-----------------------------------|----------------|
| Preheating | $\Delta T \leq 150^\circ\text{C}$ | -              |

## Soldering Iron

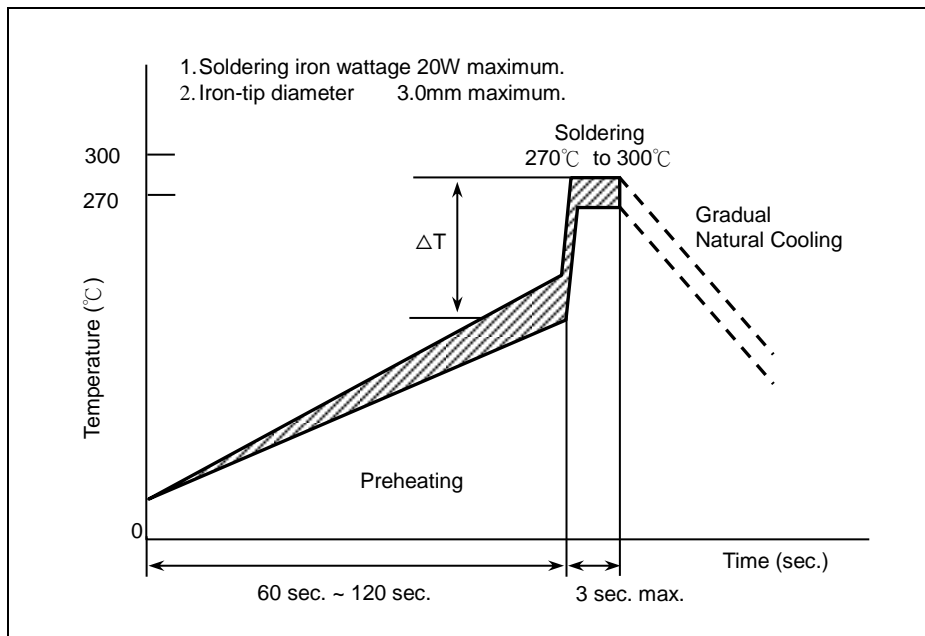


| Chip Size  | 3216 and smaller                  | 3225 and above                    |
|------------|-----------------------------------|-----------------------------------|
| Preheating | $\Delta T \leq 190^\circ\text{C}$ | $\Delta T \leq 130^\circ\text{C}$ |



**[Soldering]**


**Reflow Soldering for Lead free Termination**

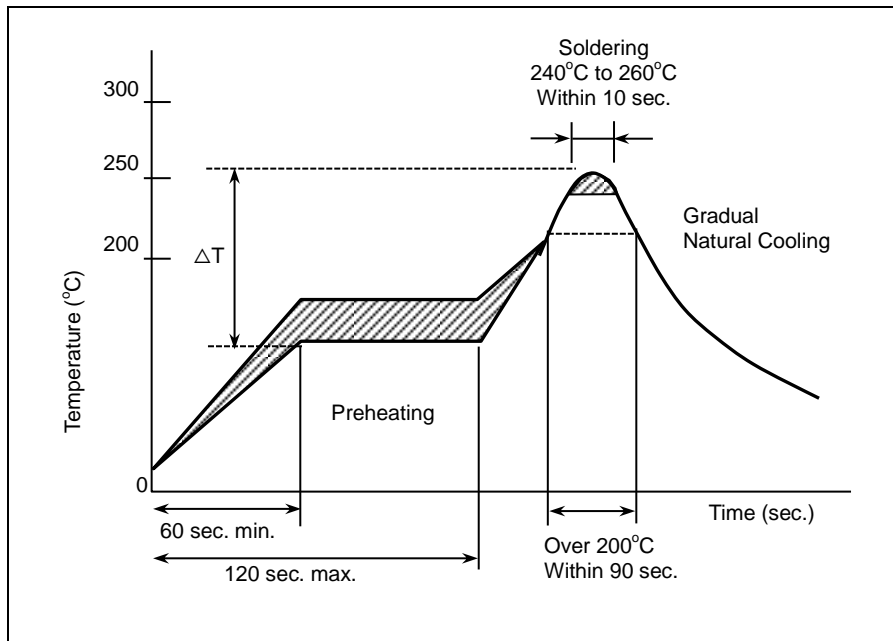

The difference between solder and chip surface should be controlled as following table. The rate of preheat should not exceed 4°C/sec and a target of 2°C/sec is preferred.

| Chip Size  | 3216 and smaller                  | 3225 and above                    |
|------------|-----------------------------------|-----------------------------------|
| Preheating | $\Delta T \leq 150^\circ\text{C}$ | $\Delta T \leq 130^\circ\text{C}$ |


**Wave Soldering for Lead free Termination**

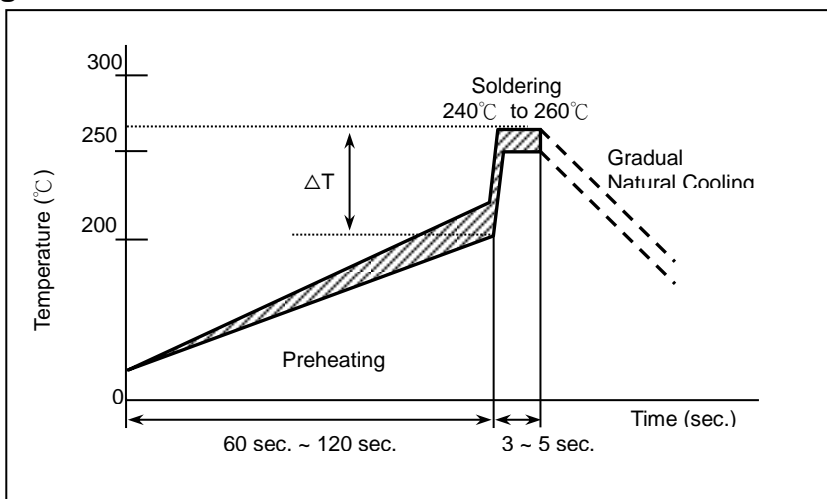

| Chip Size  | 3216 and smaller                  | 3225 and above |
|------------|-----------------------------------|----------------|
| Preheating | $\Delta T \leq 150^\circ\text{C}$ | -              |

MLCC


## Soldering Iron

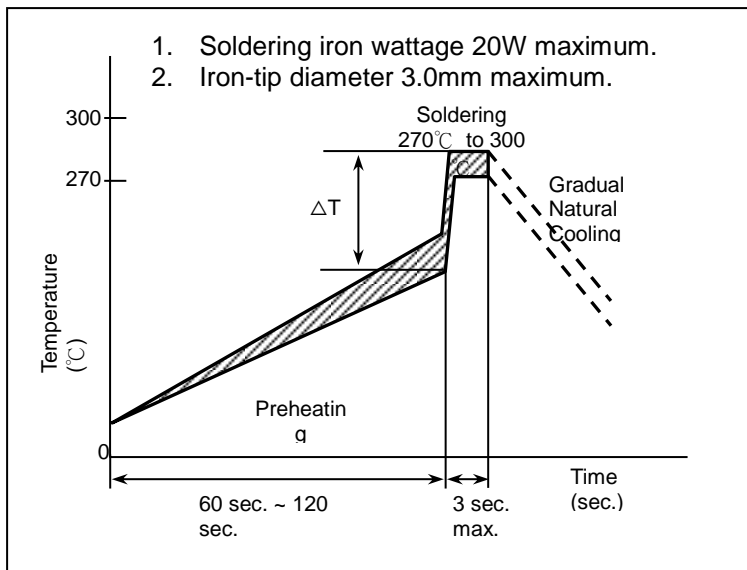


| Chip Size  | 3216 and smaller                    | 3225 and above                      |
|------------|-------------------------------------|-------------------------------------|
| Preheating | $\Delta T \leq 190^{\circ}\text{C}$ | $\Delta T \leq 130^{\circ}\text{C}$ |

### 【Chip Layout and Breaking PCB】

- To layout the SMD capacitors for reducing bend stress from board deflection of PCB. The following are examples of Hood and bad layout.

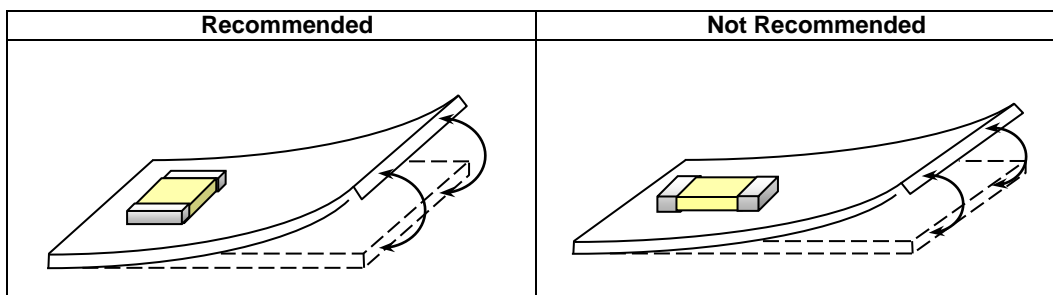


- When breaking PCB, the layout should be noted that the mechanical stresses are depending on the position of capacitors. The following example shows recommendation for better design.

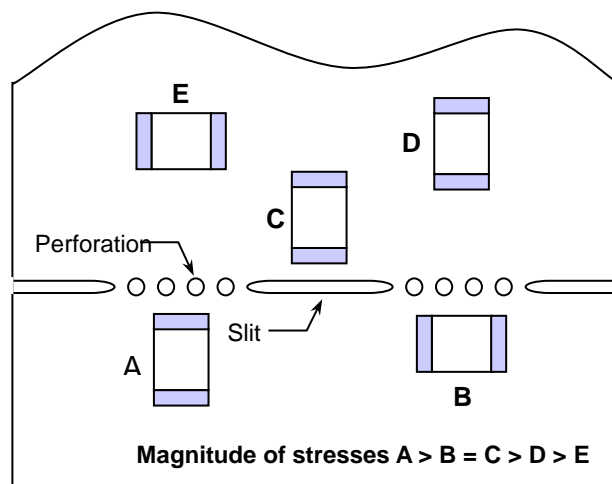

**【Aging Rate】**

The capacitance and dissipation factor of class 2 capacitors decreases with time. It is known as ‘aging’ that follows a logarithmic law and expressed in terms of an aging constant. Aging is caused by a gradual re-alignment of the crystalline structure of the ceramic. The aging constant is defined as the percentage loss of capacitance at a ‘time decade’. The law of capacitance aging is expressed as following equation:

Typical Curve of Aging Rate of Different Dielectric Material

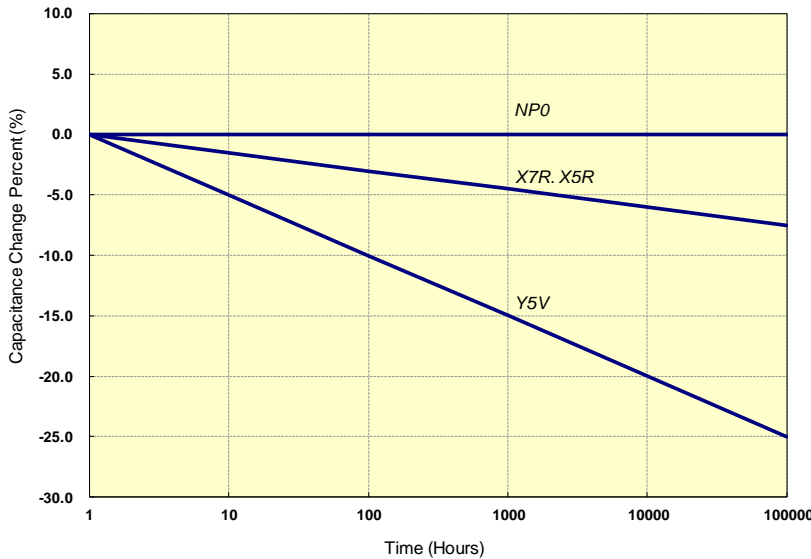

$$C_{t2} = C_{t1} \times (1 - k \times \log_{10}(t_2/t_1))$$

$C_{t1}$ : Capacitance after  $t_1$  hours of start aging.

$C_{t2}$ : Capacitance after  $t_2$  hours of start aging.

$k$ : aging constant (capacitance decrease per decade)

$t_1, t_2$ : time in hours from start of aging.

A typical curve of aging rate is shown in following figure.


When heating the capacitors above Curie temperature (130°C~150°C) the capacitance can be re-new. So capacitance of class 2 capacitors will be complete de-aged by soldering process; subsequently a new aging process begins.

Because of aging, it is specified an age for measurement to meet the prescribed tolerance for class 2 capacitors. Normally, 1000 hours ( $t_2=1000$  hrs) is defined.

**【Peeling Off Force】**

Peeling off force: 0.1N to 1.0 N\* in the direction shown as below.

The peeling speed: 300±10 mm/min



1. The taped tape on reel is wound clockwise. The sprocket holes are to the right as the tape is pulled toward the user.
2. There are minimum 150 mm as the leader and minimum 40 mm empty tape as the tail is attached to the end of the tape.